

A Recessed Trimless Dimmable LED Linear Fixture for Damp Location 97 CRI (3K) with Screwless Decorative U-Shaped White Acrylic Diffuser and Integral Dimmable Driver

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser. Suitable for wall or ceiling mount applications.

Features:

- 1. Diffuser:** High Transmission U-shaped white acrylic. Diffuser attachment friction fit or clips.
- 2. Lamping:** 50,000 hour 3.9W x 1 (3.9W per foot) LED light source.
- 3. Electrical:** HDA - 120V - 277V. LTE - 120V only. 120V Lutron constant voltage Highlume A dimmable driver. Lutron driver single dimmable to 1%, 3 wire dimming.
- 4. Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- 5. Housing:** Fixture wall is .0625 extruded aluminum.
- 7. White powder coated wiring cover.**
- 8. Fixture has one 1/2" knockout on end where ballast is located.**

Housing Dimensions: 3.50"W x 3"D

Length: See Chart

Patent: Design Patent No. 473,670S

US Patent No. US 6,616,309 B2

Voltage: 120V or 277V

L Brackets: Add suffix "M-1" or

"MOD" = modified bracket (consult factory)



Label: ETL for damp location

For updated specifications, see our website: www.dreamscapelighting.com

LED Wattage per Foot	Lumens per Foot	CRI
3.9W	356	97
Color Temp: 3K-90		

Fixture Wattage per Foot	Lumens per Foot	CRI
4.6W	200	97
Color Temp: 3K-90		

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.

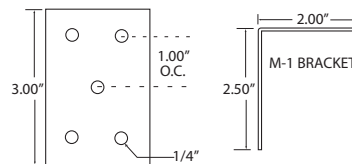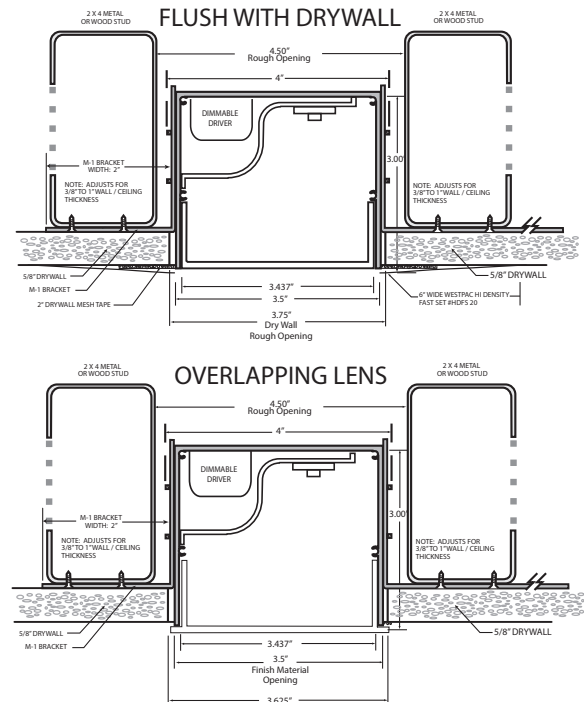

OPTIMAL DIMENSIONS

are in increments
of 3" + 1"

For longer lengths
consult factory

Prefix	Series	Length	Lens Type	Lens Mounting	Temperature	Watts per Foot	Mounting	Mounting Bracket	Dimming	Voltage
DLED	9000	49	HTW-B	FL	3K-90	3.9	WM	Standard Bracket M-1	Highlume 1% Dimming Driver	120
		(_____")	Transmission	FL	(3000K)		Mount	Bracket	A-Series	240
		MOL	Semi-Gloss White	Overlap	97+ CRI		WM	M-1	3 Wire Dimming	277
		Optimal dimension divide by 3 and add 1.	HTW-B	OL			Ceiling Mount	Modified Bracket	LTE (120V only)	
			High Transmission				CM	MOD	2-Wire	
			White Satin						Lutron Driver	
			HTW-SB							

Ordering Example: **DLED-9000-49-HTW-B-FL-3K-90-3.9-WM-M-1-HDA-120**