

A Recessed Trimless Dimmable LED Linear Fixture for Damp Location with Screwless 98 CRI (3K) Decorative U-Shaped White Acrylic Diffuser and Integral Dimmable Driver

| | | |
|---------|------|----------------|
| PROJECT | TYPE | CATALOG NUMBER |
|---------|------|----------------|

Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser Suitable for wall or ceiling mount applications.

Features:

- Diffuser:** High Transmission .
B - Semi-Gloss Standard
SB - Satin Finish
 U-shaped white acrylic. Diffuser attachment friction fit or clips.
- Lamping:** 35,000 hour 3.9W x 2 (7.8W per foot) LED light source.
- Electrical:** HDA - 120V - 277V. LTE - 120V only. 120V Lutron constant voltage HighLume A dimmable driver. Lutron driver single dimmable to 1%, 3 wire dimming.
Lutron HDA Driver - 3-wire dimming with Lutron dimmers.
Lutron LTE Driver - 2-wire dimming with Lutron dimmers.
LTF Driver - 2-wire dimming with reverse phase with neutral or ELV dimming.4.
Adjustable L-Bracket: Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

Housing Dimensions: 3.50"W x 3"D

Length: See Chart

Patent: Design Patent No. 473,670S

US Patent No. US 6,616,309 B2

Voltage: 120V or 277V.

L Brackets: Add suffix "M-1" or

"MOD" = modified bracket (consult factory)

Label: ETL for damp location.

For updated specifications, see our website: www.dreamscapelighting.com

LED Specifications


| LED Wattage per Foot | Lumens per Foot | Color Temp. | CRI |
|----------------------|-----------------|----------------|-----|
| 7.8W | 520 | 2700K 3000K | 80+ |
| 7.8W | 712 | 3K-90 | 98 |

Color Temps: 3000K, 2700K, 3K-90

Fixture Specifications

| Fixture Wattage per Foot | Lumens per Foot | Color Temp. | CRI |
|--------------------------|-----------------|----------------|-----|
| 9.4W | 260 | 2700K 3000K | 80+ |
| 9.4W | 408 | 3K-90 | 98 |

Color Temps: 3000K, 2700K, 3K-90

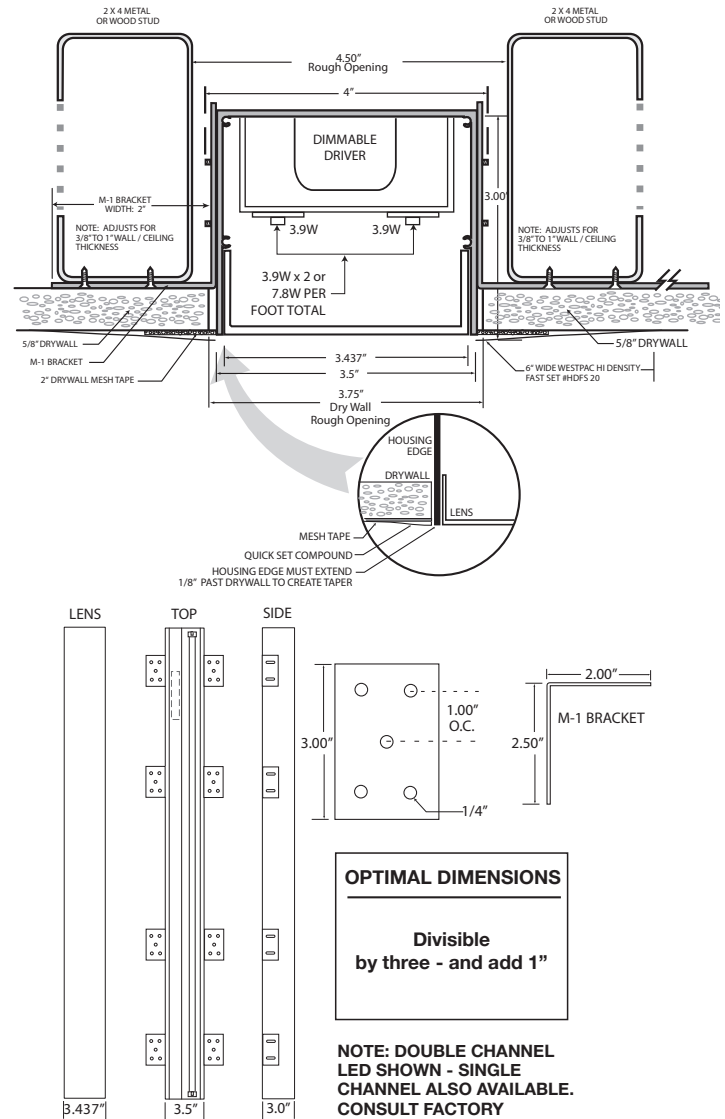

| Prefix | Series | Length Length* | Lens Type | Lens Mounting | Temperature | LED Watts per Foot | Mounting | Mounting Bracket | Dimming | Voltage |
|--------|--------|----------------|-------------------|---------------|-------------|--------------------|---------------|------------------|---------------------------|---------|
| DLED | 9000 | () MOL | HTW-B | FL | 3K-90 | 7.8 | WM | M-1 | HDA | 120 |
| DLED | 9000 | () MOL | High Transmission | Flush | 2700K | 7.8 | Wall Mount | Standard Bracket | HDA | 120 |
| | | | Semi-Gloss | FL | 3000K | | WM | Bracket | Lutron 3-Wire | 120 |
| | | | White | | 3K-90 | | Ceiling Mount | M-1 | LTE | 240 |
| | | | HTW-B | | | | CM | Modified Bracket | Lutron 2-Wire (120V only) | 277 |
| | | | High Transmission | | | | | MOD | LTF | |
| | | | Satin White | | | | | | 2-Wire (120V only) | |
| | | | HTW-SB | | | | | | | |

Ordering Example: **DLED-9000-49-HTW-B-FL-3K-90-7.8-WM-M-1-HDA-120**

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.