

### Recessed Vanity Single and Multi-Lamp Linear Trimless Fixture with Decorative Hand Finished Screwless White Acrylic Diffuser

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

#### Fixture Description:

Single and multi-lamp recessed linear fluorescent with decorative hand finished screwless white acrylic diffuser. Suitable for wall or ceiling mount applications.

#### Features:

- 1. Diffuser:** U-shaped white acrylic lens with overlapping edge. Diffuser attachment friction fit or clips.
- 2. Lamping:** See Chart
- 3. Ballast:** Integral 120V electronic HPF ballast is available as instant on or with dimming capability. All ballasts are UL listed Class P FCC compliant Class A sound rating. Add suffix "DIM" to catalog number to specify dimming ballast. "DIM-H" for Lutron Std. or HO. "DIM-U" for universal 0-10V (std. lamp only).
- 4. Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- 5. Rotating Captive Lock T5 Socket.**
- 6. Housing:** Fixture wall is .0625 extruded aluminum.
- 7. White powder coated ballast and wiring cover.**
- 8. Fixture has one 1/2" knockout on end where ballast is located.**

#### Housing Dimensions:

3.50"W x 3"D

Length: See Chart

#### Labels:

ETL Listed Damp Location

Conforms to UL1598, Certified Canada CSA 22.2

#### Patent:

Design Patent No. US D473,670 S

Patent No. US 6,616,309 B2

#### Options:


**Voltage:** 120 volts standard, 240 and 277V optional.

**Note: Optimal spacing is 25" - 30" on center.**

**NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.**

#### Optimal Lengths

Housing	Lens
23.875"	24.0"
35.875"	36.0"
46.5"	46.75"
47.875"	48.0"
63.875"	64.0"
75.875"	76.0"
87.875"	88.0"
95.875"	96.0"

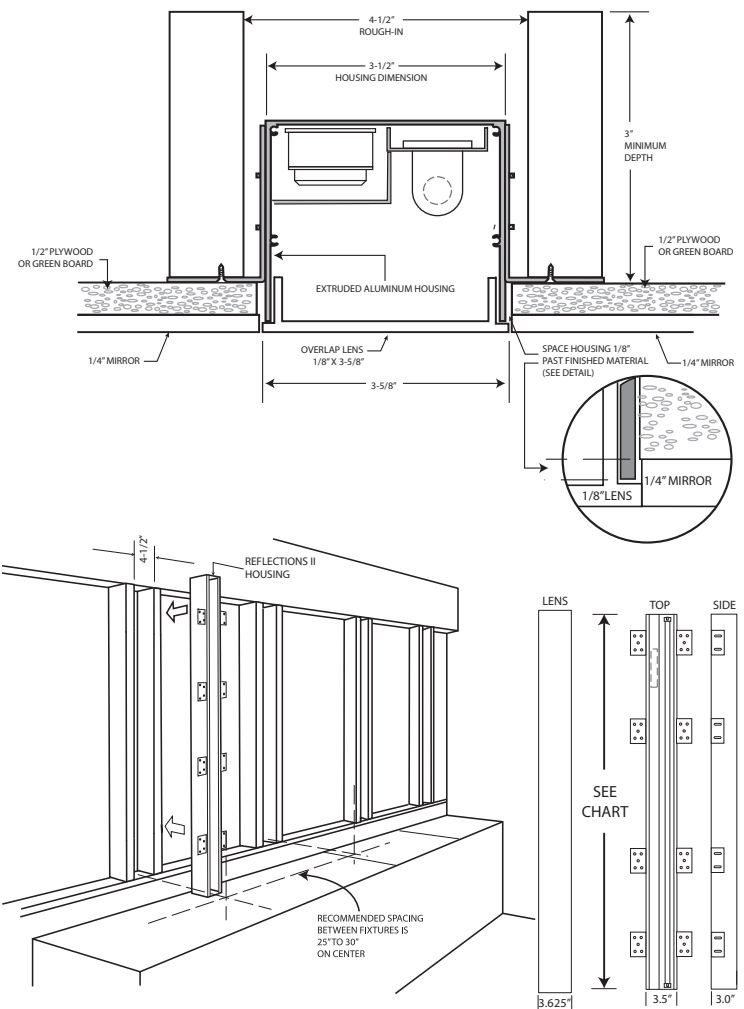

Consult [www.dreamscapelighting.com](http://www.dreamscapelighting.com) for the latest fixture specification.

To Form a Catalog Number:	Prefix	Series	Fixture Length	Ballast	Lens Style	Lens	Color Temp.	Mounting	Bracket	Switch	Voltage
	DL	111	36	HO	OL	HTW-B	3000	CM	M-1	S	120
Which Specifies:	DL	(11000) Lamp (1)	36 See other lengths in chart above left	HO High Output Ballast STD Standard Ballast	OL Overlap	HTW-B High Trans. Semi Gloss White HTW-SB High Trans. Satin White	3000K 3500K 4100K	CM Ceiling Mount WM Wall Mount	M-1 Short Bracket	S Switch DIM- (for dimming) Specify U - Universal (std. lamps only) (0-10V) or H - Lutron Highlume (std. or HO lamps)	120V 240V 277V

Ordering Example: **DL-111-36-HO-OL-HTW-B-3000-CM-M-1-S-120**