

Miniature Recessed Trimless Dimmable LED Linear Fixture with Screwless Decorative U-Shaped Extruded White Acrylic Diffuser

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

Miniature recessed trimless linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser. Suitable for wall or ceiling mount applications. 120V standard.

Features:

- Length:** 7", 10", 13"
- Diffuser:** U-shaped white acrylic. Diffuser attachment friction fit or clips. Semi Gloss White Acrylic (B) or Satin Acrylic (SB) available.
- Lamping:** LED
- Driver:** Integral 120V instant-on electronic dimmable driver, reverse phase with neutral, UL listed. Class P FCC compliant, Class A sound rating.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated ballast and wiring cover.**
- Fixture has one 1/2" knockout on each end.**
- Lenses:** White extruded acrylic Flush Mount (FL) or Overlap Mount (OL).

Housing Dimensions:

3.50"W x 3"D
 Length: See Chart
 Labels: Non IC
 ETL Listed Damp Location - Conforms to UL1598, Certified Canada CSA 22.2


Patent:

Design Patent No. 473,670S
 US Patent No. US 6,616.309 B2

LED Specifications

LED Specs	
Watts	3.9 x 2 (7.8W) per foot
Lumens	260 lumens per foot x 2 (3000K) 100 lumens per foot x 2 (2400K)
Color Temp.	2400K / 2700K / 3000K
LED Life	3 years - 35,000 hours

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.

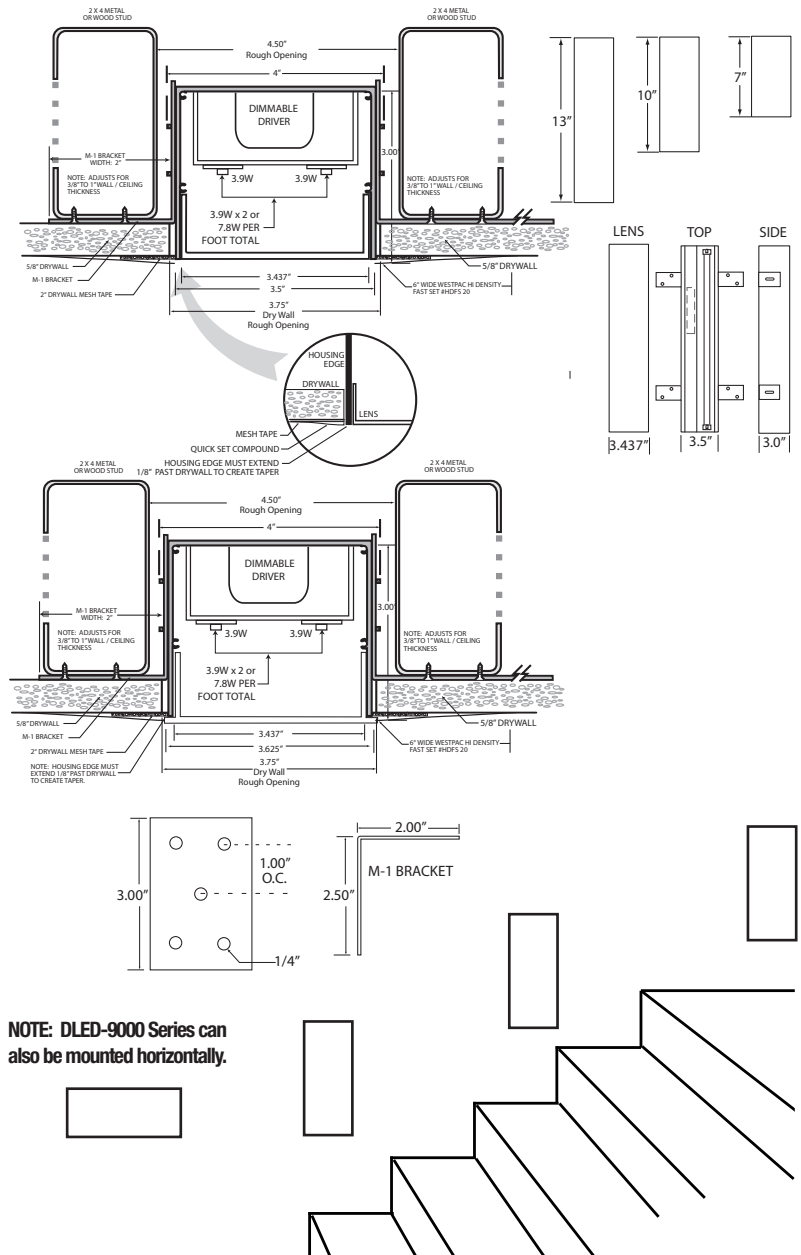

NOTE: DLED-9000 Series can also be mounted horizontally.

Prefix	Item No.	Lens Type	Lens Finish	Color Temp.	Voltage	LED Wattage
DLED	9007	OL	B	300K	120	7.8
DLED	7"	Overlap	B	2400K	120V	7.8
	9007	OL	Semi Gloss White	2700K		Double Row LED
	10"	Flush	Acrylic	3000K		
	9010	FL	SB			
	13"		Satin Acrylic			
	9013					

Ordering Example: **DLED-9007-OL-B-3000K-120-7.8 (overlap lens) or DLED-9007-FL-B-3000K-120-7.8 (flush lens)**

Consult www.dreamscapelighting.com for the latest fixture specification.