

Semi-Recessed Damp Location Trimless Dimmable LED Fixture with Screwless Decorative Semi-Tubular Shaped White Frosted Acrylic Diffuser and Integral Electronic Driver - 97 CRI (3K)

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

Single-lamp recessed damp location trimless dimmable 3.9W LED linear fixture with a semi-tubular frosted white acrylic diffuser. The decorative frame may be hidden or exposed.

Features:

- Diffuser:** High Transmission semi tubular shaped frosted white acrylic. Diffuser attachment friction fit or clips. Sand blasted white finish available.
- Lamping:** 50,000 hour 1 x 3.9W LED light source.
- Dimming:** Select from the following options that feature LUTRON products.
 LUTRON HDA -ECO Hi-Lume™ 1% Eco-System or 1% 3-Wire
 LUTRON LTE Hi-Lume™ 1% 2-Wire Driver/Dimmer
 LTF 2-Wire Driver/Dimmer
 LTF 0-10 Driver/Dimmer
 LTF - ELV Reverse Phase with Neutral.
NOTE: Every 4' of length will require 1 driver.
Example: 96" length includes 2 drivers.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

Housing Dimensions: 3.50"W x 3"D

Length: See Chart

Patent: Design Patent No. 473,670S


US Patent No. US 6,616,309 B2

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.



LED Wattage per Foot	Lumens per Foot	CRI
3.9W	356	97
Color Temp: 3K-90		

Fixture Wattage per Foot	Lumens per Foot	CRI
4.6W (3.9W)	250	97
Color Temp: 3K-90		

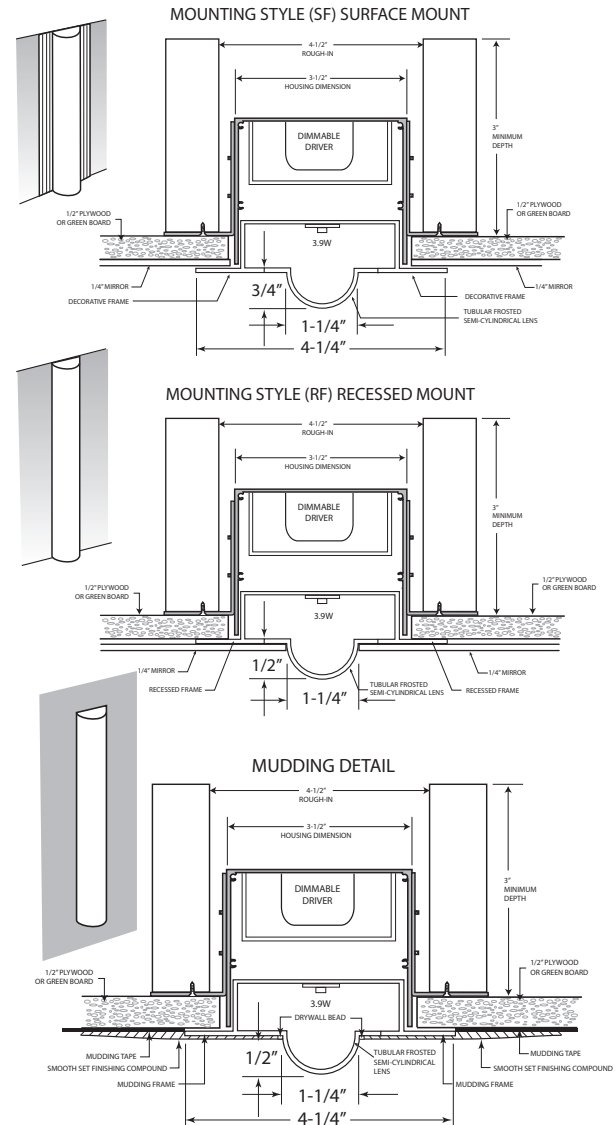

To Form a Catalog Number:	Prefix DLED	Series 9700	Length* 49	LED Length* (_____") MOL	Lens Type FR	Mounting Style RF	Color Temp. 3K-90	LED Watts per Ft. 3.9	Wall Mount WM	Mounting M-1	Dimming HDA	Voltage 120
Which Specifications:	DLED	9700	Length	(_____") MOL	Frosted FR	RF Recessed Mount Frame	3K-90 (3000K) 97+ CRI	3.9	WM	Mounting Bracket M-1	HDA-ECO LUTRON Hi-Lume™ 1% EcoSystem	120 or 277
				*Note: Optimal dimension is ± by 3 plus 1"		SF Surface Mount Frame				Modified Bracket MOD	HDA-ECO-3 LUTRON Hi-Lume™ 1% 3-Wire	120 or 277
											LTE LUTRON 1% 2-Wire	120
											LTF 2-Wire	120
											LTF-0-10	120 or 277
											LTF-ELV	120 or 277

Ordering Example: **DLED-9700-49MOL-FR-RF-3K-90-3.9-WM-M-1-HDA-120**