

Recessed Trimless Dimmable LED Bath / Vanity Fixture with Screwless Decorative 97 CRI (3K) U-Shaped White Acrylic Diffuser and Integral Electronic Driver

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white overlap acrylic diffuser. Suitable for wall or ceiling mount applications.

Features:

- 1. Diffuser:** High Transmission U-shaped white acrylic. Diffuser attachment friction fit or clips. Sand blasted white finish available.
- 2. Lamping:** 50,000 hour 2 x 3.9W LED light source.
- 3. Electrical:** All drivers are constant voltage. 24V DC.
- 4. Dimming:** Lutron L3DAE-Hume 1% EcoSystem 120V-277V
Lutron LTEA-2Wire-Hume forward phase 120V
LTF - 2-wire reverse phase with neutral 120V
LTF - 2-wire reverse phase with neutral 277V
LTF-0-10 volt dimming - 120V or 277V
- 4. Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- 5. Housing:** Fixture wall is .0625 extruded aluminum.
- 7. White powder coated wiring cover.**
- 8. Fixture has one 1/2" knockout on end where ballast is located.**

Housing Dimensions: 3.50"W x 3"D
Length: See Chart

Patent: Design Patent No. 473,670S

US Patent No. US 6,616,309 B2



Voltage: 120V or 277V.

L Brackets: Add suffix "M-1" or "MOD" = modified bracket (consult factory)

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.

LED Wattage per Foot	Lumens per Foot	Color Temp.	CRI
7.8W	712	3K-90	97
7.8W	700	27K-90	90+
7.8W	712	35K-90	90+

Fixture Wattage per Foot	Lumens per Foot	Color Temp.	CRI
9.4W	390	3K-90	97
9.4W	382	27K-90	90+
9.4W	390	35K-90	90+

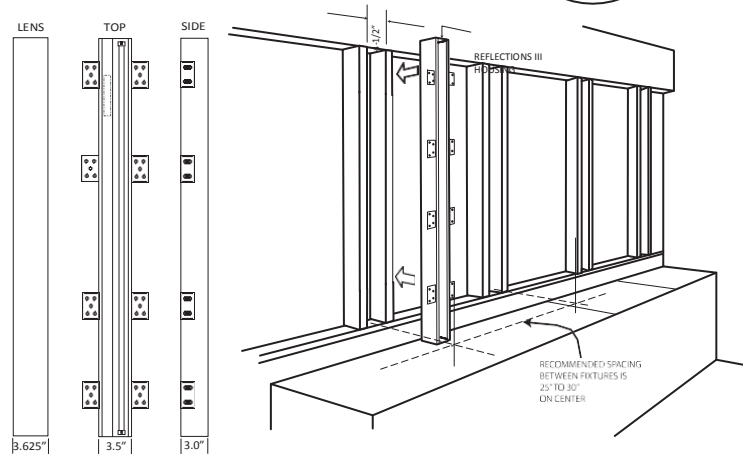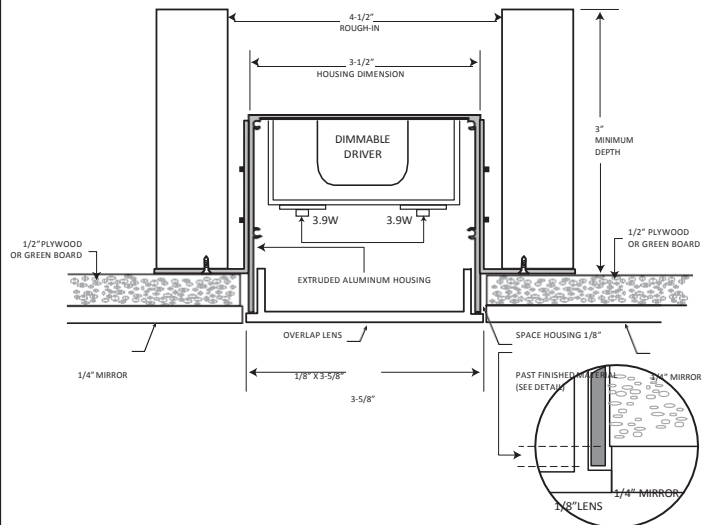

To Form a Catalog Number:	Prefix DLED	Series 122	Length* 49	LED Length*	Lens Type HTW-B	Lens Placement OL	Color Temp. 3K-90	LED Watts per Ft. 7.8	Wall Mount WM	Dimming LTF	Voltage 120
Which Specifies:	DLED	12000	Length	OPTIMAL DIMENSIONS: 25", 37", 49", 61" 73", 85", 97"	High Trans. Semi-Gloss White HTW-B	Overlap OL	3K-90 27K-90 35K-90	7.8	WM	L3DAE Lutron Eco System LTEA2W Lutron 2-Wire LTF LTF LTF LTF-0-10 LTF-0-10	120-277 120 120 277 120 277
IMPORTANT: Dreamscape can manufacture any dimension required.				NOTE: ANY DIMENSION MAY BE FABRICATED, BUT LIGHT UNIFORMITY MAY BE IMPACTED	High Trans. Satin White HTW-SB						

Ordering Example: DLED-12000-49MOL-HTW-B-OL-3K-90-7.8-WM-M-1-LTEA2-120