

Project:

# ILLUME IONIC SPECIFICATION SHEET

LED COLUMN LUMINAIRE WITH WHITE ACRYLIC DIFFUSER AND BRASS BASE  
SURFACE MOUNT OR FREE STANDING

Date:

Type:

Cat. No: **DLED-49+** \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_

**Fixture Description:**

A 24", 36" or 48" illuminated LED column that emits low maintenance LED light through a diffuser of white acrylic. The diffuser sits atop a solid brass post and base that measures 18" or 36" tall. The LED light source is available in a variety of Kelvin temperatures, and in RGB.


**Features:**

- Diffuser:** 3" O.D. white acrylic
- Lamping:** LED - 2.5 watts per ft. Available color temperatures are 2700K, 3100K and RGB. Light source is enclosed inside of a wet location light tube.
- Voltage:** 24V AC/DC
- Base, Post and Top Cap Construction:** Solid brass.

**Base and Cap Finishes:**

1. Verdè, 2. Satin Nickel,
  3. Copper Bronze, 4. White\*,
  5. Ancient Bronze, 6. Brass Bronze,
  7. Custom, 8. Copper Plate,
  9. Ancient Verdè, 10. Grey Bronze, 11. Rust Brown\*,
  12. Black\*, 13. Pewter.
- \* powder coat

**NOTE:** RGB requires additional controls to operate.  
50,000 hour LED lamp life.  
2 year warranty. Wet location okay.  
**WARNING:** Solid state transformers may not be compatible with our LED products.  
Recommended power supplies: Use either approved magnetic transformers or approved LED electronic drivers.

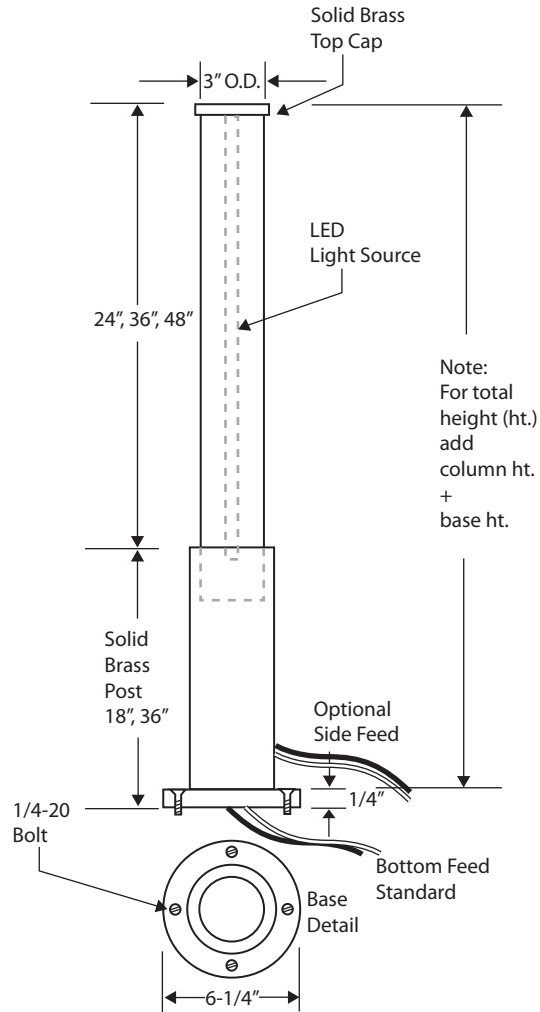

**ORDERING EXAMPLE**

Item No.	Base Height in Inches	Column Height in Inches	Color Temp.	Finish
<b>DLED-49</b>	<b>18</b>	<b>36</b>	<b>3000</b>	<b>5</b>
	18" (for 24", 36" column)	24"	2700K	(see finishes above)
	36" (for 48" column)	36" 48"	3000K	

**NOTE:**  
Bottom feed standard unless side feed specified.  
Custom Sizes Available - Consult Factory

