

35,000 Hour LED Dimmable Edge Lit Light Source That Provides Even Illumination With a Approved for Closet Applications - Very Shallow Profile - 350 Lumens (for 12") - CRI 80

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

The DLED-6300 Enlighten Illuminator is a 24V LED light panel that provides even LED illumination with a very shallow profile. Enlighten Illuminator is designed to give long consistent color over the 35,000 hr. lamp life, because of good thermal management of the SMD's and quality phosphors used in production. This LED light panel can be used as an accent or undercabinet / shelf light, or as a wall sconce with clean, modern lines. A 35,000 hr. lamp life greatly reduces maintenance. Available in a direct to surface (DTS).

Construction:

Steel / aluminum white powder coated frame that encases the LED source.

Electrical:

24 Volt DC Constant Voltage remote driver. for 12" and 24" fixture. 350 lumens per foot. Dimmable. Bottom feed. Wattages: 12" (6.2 watts), 24" (11.8 watts.). See diagrams at right for wire exit position. ETL listed.

Applications:

- Wall Sconce • Cabinet Lighting • Accent Lighting

Mounting:

Surface mount utilizing screws provided.

Label:


ETL Listed. Approved for closets.

NOTE: Contact Dreamscape Lighting for appropriate constant voltage dimmable remote power supply. For most current information consult our website at www.dreamscapelighting.com.


Please consult our website for any updated specifications on this product: www.dreamscapelighting.com

LED Specifications



Voltage	24 Volt DC Constant Voltage
Watts	12" - 6.2 Watts
	24" - 11.8 Watts
Lumens	350 (12")
	700 (24")
Color Temp.	2700K
CRI	80
Beam Spread	120°
Mounting	Direct to surface
Warranty	3 year / 35,000 Hrs. (in an environment that reaches no higher than 60°C / 140°F) NOTE: Please contact factory regarding warranty if fixture is exposed to higher ambient temperatures.

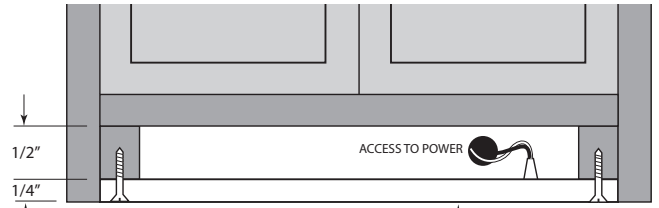

CABINET MOUNTING DETAIL - FRONT VIEW
MOUNTING BENEATH CABINET

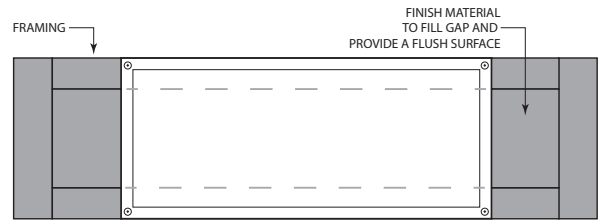

UNDERCABINET / CLOSE VIEW

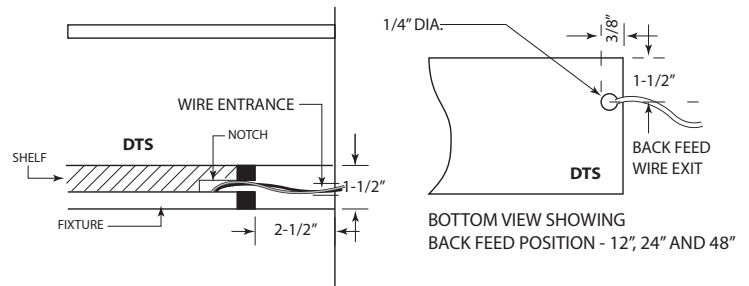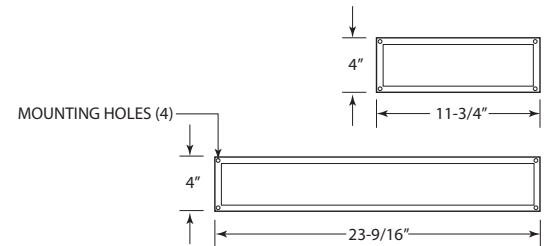

BOTTOM VIEW SHOWING BACK FEED POSITION - 12", 24" AND 48"

Model Number	Length (depends on Mounting)	Mounting	Color Temp
DLED-6300	12 (4"W x 11-3/4"L)	DTS Direct to Surface 12", 24"	2700K
	24 (4"W x 23-9/16"L)		

Ordering Example: **DLED-6300-24-DTS-2700**