

### A Recessed Trimless Dimmable LED Linear Fixture for Damp Location with Screwless 98 CRI (3K) Decorative U-Shaped White Acrylic Diffuser and Integral Dimmable Driver

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

#### Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser Suitable for wall or ceiling mount applications.

#### Features:

- Diffuser:** High Transmission .  
**B** - Semi-Gloss Standard  
**SB** - Satin Finish
- Lamping:** 35,000 hour 3.9W x 2 (7.8W per foot) LED light source.
- Dimming:** Select from the following options that feature LUTRON products.  
 LUTRON L3DA-ECO Hi-Lume 1% Eco-System or 1% 3-Wire  
 LUTRON LTEA2W Hi-Lume™ 1% 2-Wire Driver/Dimmer  
 LTF 2-Wire Driver/Dimmer 120  
 LTF-0-10 Driver/Dimmer 120 or 277  
 LTF-ELV Reverse Phase with Neutral. 120-277
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

**Housing Dimensions:** 3.50"W x 3"D

**Length:** See Chart

**Patent:** Design Patent No. 473,670S

US Patent No. US 6,616,309 B2

**Voltage:** 120V or 277V.

L Brackets: Add suffix "M-1" or

"MOD" = modified bracket (consult factory)

**Label:** ETL for damp location.




LED Wattage per Foot	Lumens per Foot	Color Temp.	CRI
7.8W	712	3K-90	97
7.8W	700	27K-90	90+
7.8W	712	35K-90	90+

Fixture Wattage per Foot	Lumens per Foot	Color Temp.	CRI
9.4W	390	3K-90	97
9.4W	382	27K-90	90+
9.4W	390	35K-90	90+

Prefix	Series	Length	Length*	Lens Type	Lens	Temperature	LED Watts	Mounting	Dimming	Voltage
DLED	9000		(Maximum Overall Length)	HTW-B	Mounting	3K-90	per Foot	WM	HDA	120
			" M.O.L.	HTW-B	FL	27K-90	7.8	CM		
				High Transmission	Flush	3K-90	7.8	Wall Mount	HL3DAECO	120 277
				Semi-Gloss	FL	27K-90		Ceiling Mount	LUTRON Hi-Lume™ 1% EcoSystem	
				White		35K-90			LTEA2W	120
				High Transmission					LUTRON Hi-Lume™ 1% 2-Wire	
				Satin White					LTF	120
				HTW-SB					LTF 2-Wire	120
									LTF 3-Wire	120
									LTF-0-10	120 or 277
									LTF-ELV	120 or 277

**NOTE: ANY DIMENSION MAY BE FABRICATED, BUT LIGHT UNIFORMITY MAY BE IMPACTED**

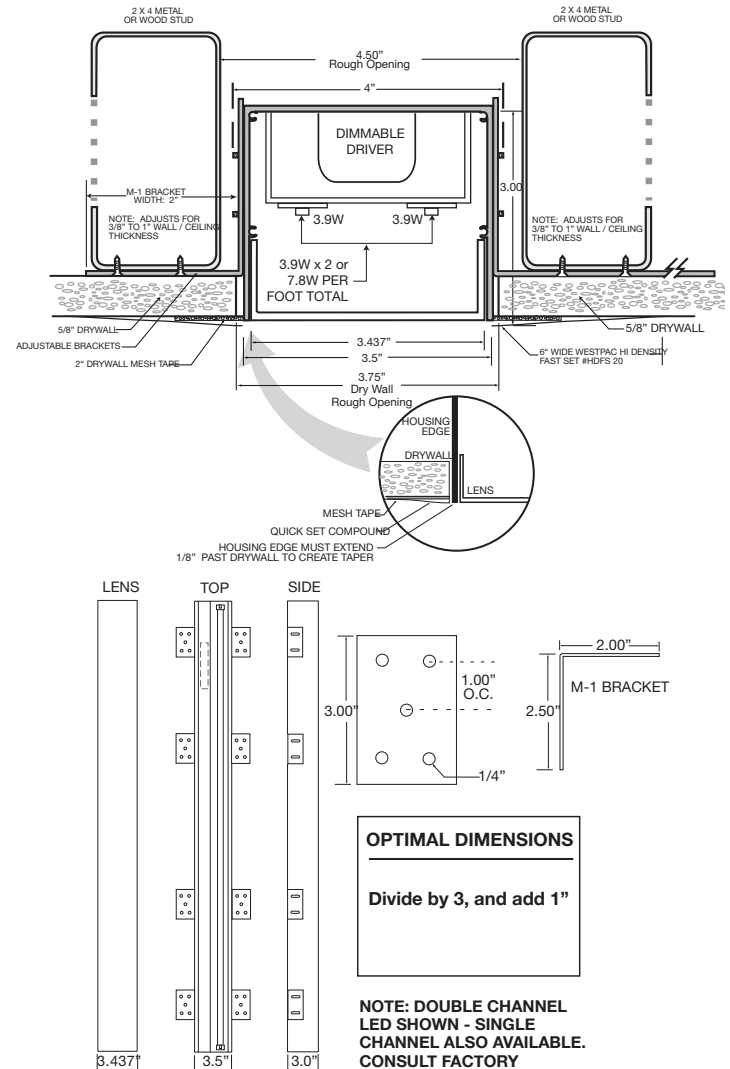

OPTIMAL DIMENSIONS	
Divide by 3, and add 1"	

**NOTE: DOUBLE CHANNEL LED SHOWN - SINGLE CHANNEL ALSO AVAILABLE. CONSULT FACTORY**

Ordering Example: **DLED-9000-49-HTW-B-FL-3K-90-7.8-WM-LTF-0-10-120**

**NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.**

©2015 Dreamscape Lighting  
 Specifications are subject to change without notice.

5521 West Washington Blvd.  
 Los Angeles, CA 90016

Telephone: (323) 933-5760  
 FAX: (323) 933-3607

www.dreamscapelighting.com  
 info@dreamscapelighting.com



DLED-9000-7.8\_31419