

### Semi-Recessed Damp Location Trimless Dimmable LED Fixture with Screwless Decorative Semi-Tubular Shaped White Frosted Acrylic Diffuser and Integral Electronic Driver - 97 CRI (3K)

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

#### Fixture Description:

Single-lamp recessed damp location trimless dimmable 3.9W LED linear fixture with a semi-tubular frosted white acrylic diffuser. The decorative frame may be hidden or exposed.

#### Features:

- Diffuser:** High Transmission semi tubular shaped frosted white acrylic. Diffuser attachment friction fit or clips. Sand blasted white finish available.
- Lamping:** 50,000 hour 1 x 3.9W LED light source.
- Dimming:** Select from the following options that feature LUTRON products.  
LUTRON HDA-ECO Hi-Lume™ 1% Eco-System or 1% 3-Wire  
LUTRON LTEA2W Hi-Lume™ 1% 2-Wire Driver/Dimmer  
LTF 0-10 Driver/Dimmer  
ELV Reverse Phase with Neutral and Phase Dimming  
**NOTE: Every 4' of length will require 1 driver.**  
**Example: 96" length includes 2 drivers.**

- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

**Housing Dimensions:** 3.50"W x 3"D

**Length:** See Chart

**Patent:** Design Patent No. 473,670S


US Patent No. US 6,616,309 B2

**NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.**



LED Wattage per Foot	Lumens per Foot	CRI
3.9W	356	97
Color Temp: 3K-90		

Fixture Wattage per Foot	Lumens per Foot	CRI
4.6W (3.9W)	250	97
Color Temp: 3K-90		

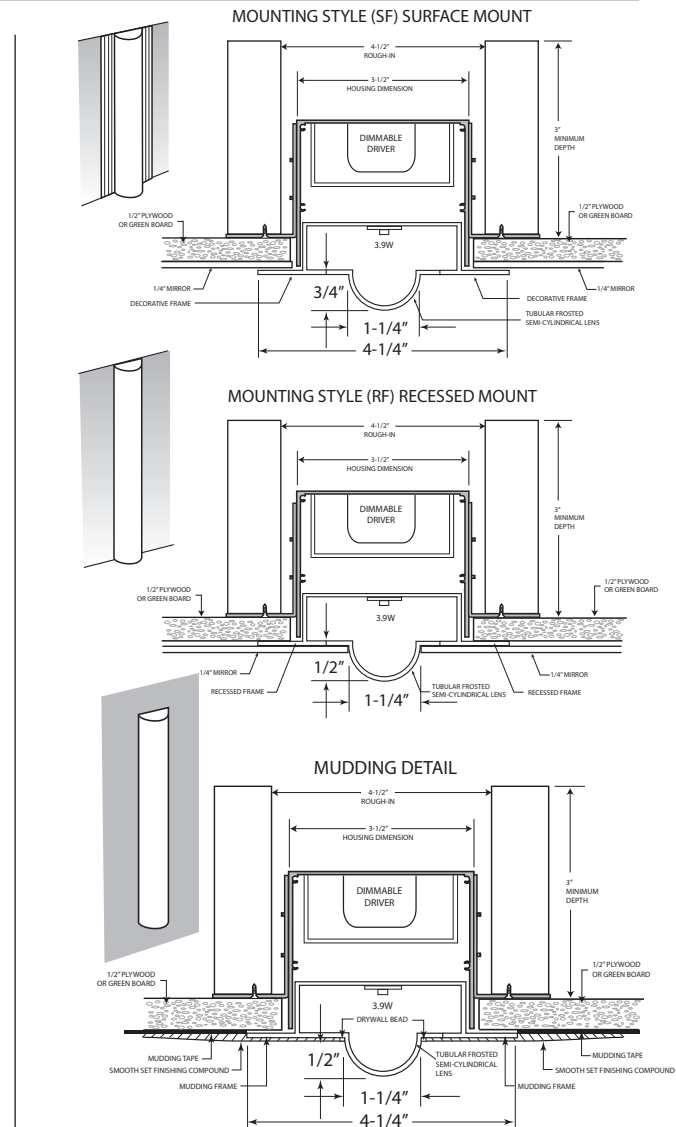

To Form a Catalog Number:	Prefix DLED	Series 9700	Length* 49	LED Length* (_____") MOL	Lens Type FR	Mounting Style RF	Color Temp. 3K-90	LED Watts per Ft. 3.9	Wall Mount WM	Mounting M-1	Dimming HDA	Voltage 120
Which Specifications:	DLED	9700	Length	(_____") MOL	Frosted FR	RF Recessed Mount Frame	3K-90+ 27K-90+ 35K-90+	3.9	WM	Mounting Bracket M-1	HDA-ECO LUTRON Hi-Lume™ 1% EcoSystem	120/277
				*Note: Optimal dimension is ÷ by 3 plus 1"		SF Surface Mount Frame				Modified Bracket MOD	LTEA2W LUTRON Forward Phase 2-Wire	120
											LTF 0-10 Dimming 2-Wire	120
											LTF 0-10 Dimming 2 Wire	277

Ordering Example: **DLED-9700-49MOL-FR-RF-3K-90-3.9-WM-M-1-LTEA2W-120**