

Project:

3-Step Wet Recessed LED Step Light SPECIFICATION SHEET

Date:


Energy efficient, decorative step illumination

Lamping: .625W LED

Cat. No. *DLED-125 Wet Location Overlap Faceplate*

4 Screws Face Plate

Type:

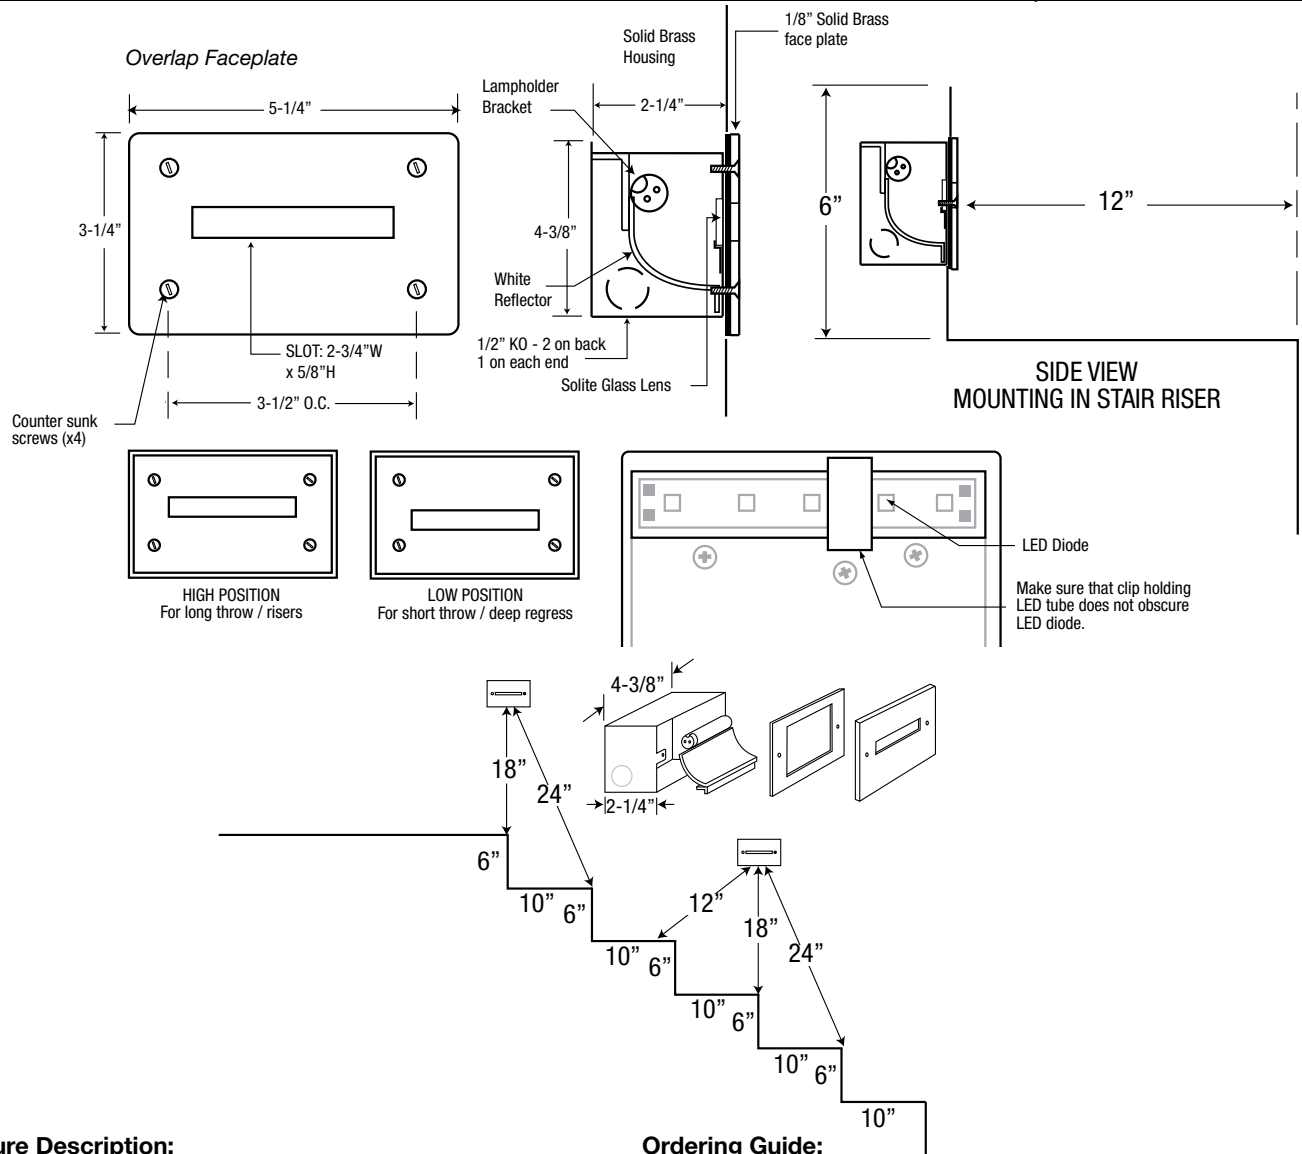

Fixture Description:

Solid brass construction with diffused glass.

Electrical:

Remote 24 volt AC power supply.

Mounting:

Recessed Mount. Mounts to DL-271 brass single gang wall box (supplied and shown in dimension drawing).

Lamp:

.625 watt LED - 2700K - inside acrylic tube enclosure.

Lenses:

Diffused glass mounted permanently to faceplate.

Finishes: *Available in all finishes.*

Ordering Guide:

DLED-125 Dry or DLED-125-Wet-Overlap Faceplate

Includes DL-271 mounting box.

Finish Guide:

1. Verde
2. Satin Nickel
3. Copper Bronze
4. White*
5. Ancient Bronze
6. Brass Bronze
7. Custom
8. Copper Plate
9. Ancient Verde
10. Grey Bronze
11. Rust Brown*
12. Black*
13. Pewter
14. Oil Rubbed Bronze
15. Copper Edge Bronze*
16. Black Iron Textured*
17. Copper Bronze Powder Coat*

*Powder coat finish.