

Recessed Damp Location Trimless Dimmable Linear Vanity Fixture with Screwless Decorative 97 CRI (3K) U-Shaped White Acrylic Diffuser and Integral Electronic Driver

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

Recessed damp location trimless dimmable linear LED fixture with screwless decorative white acrylic diffuser.

Features:

- Diffuser:** High Transmission U-shaped white acrylic snap fit lens.
- Lamping:** 50,000 hour 2 x 3.9W LED light source.
- Electrical:** All drivers are constant voltage. 24V DC.
- Dimming:** Lutron L3DAE EcoSystem 120V - 277V
Lutron LTEA2W - 2-wire Forward Phase Dimming 120V
LTF - 2-wire reverse phase with neutral 120V
LTF-0-10 volt dimming - 120V or 277V
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- NOTE:** For any other thickness contact factory for a custom bracket.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on each end.**

Housing Dimensions: 3.50"W x 3"D

Length: See Chart

Patent: Design Patent No. 473,670S

US Patent No. US 6,616,309 B2



Voltage: 120V or 277V.

Fixture Support: Adjustable 'L' brackets.

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.

LED Wattage per Foot	Lumens per Foot	Color Temp.	CRI
7.8W	712	3K-90	97
7.8W	700	27K-90	90+
7.8W	712	35K-90	90+

Fixture Wattage per Foot	Lumens per Foot	Color Temp.	CRI
9.4W	390	3K-90	97
9.4W	382	27K-90	90+
9.4W	390	35K-90	90+

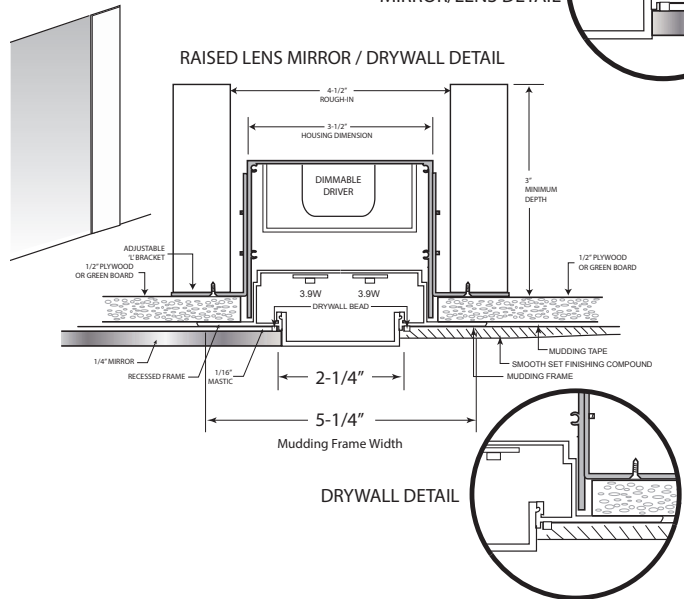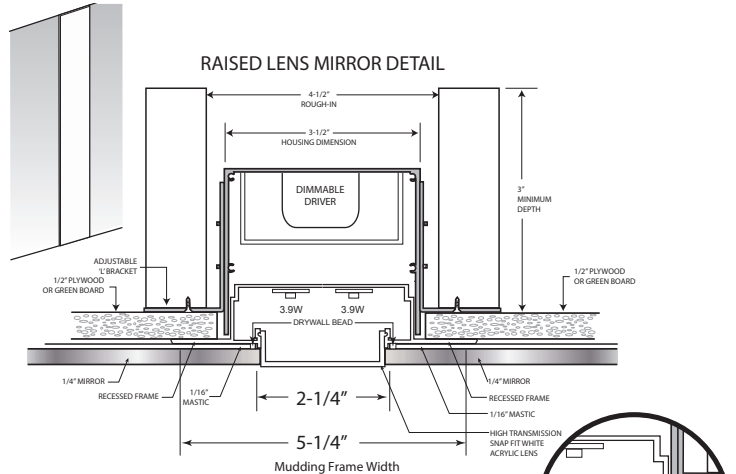

To Form a Catalog Number:	Prefix DLED	Series 9800	Length* 49	LED Length*	Lens RL14	Color Temp. 3K-90	LED Watts per Ft. 7.8	Wall Mount WM	Dimming LTF	Voltage 120
Which Specifies:	DLED	9800	Length	OPTIMAL DIMENSIONS: 25", 37", 49", 61" 73", 85", 97"	RL14 1/4" Raised Lens	3K-90	7.8	WM Wall Mount	HDA-Eco Lutron EcoSystem 1%	120/277
				TO SPECIFY AN OPTIMAL DIMENSION, USE A NUMBER DIVISIBLE BY 3 AND ADD 1". NOTE: ANY DIMENSION MAY BE FABRICATED, BUT LIGHT UNIFORMITY MAY BE IMPACTED		27K-90		CM Ceiling Mount	LTEA2W Lutron 2-Wire Forward Phase	120
						35K-90			LTF-0-10 ELV LTF-1-10 ELV	120 277

Ordering Example: **DLED-9800-49" MOL-RL14-3K-90-7.8-WM-LTF-0-10-120**