## Recessed Trimless Dimmable LED Bath / Vanity Fixture with Screwless Decorative 97 CRI (3K) U-Shaped White Acrylic Diffuser and Integral Electronic Driver

PROJECT. TYPF

## Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white overlap acrylic diffuser. Suitable for wall or ceiling mount applications.

## Features:

- -Diffuser: High Transmission U-shaped white acrylic. Diffuser attachment friction fit or clips. Sand blasted white finish available.
- -Lamping: 50,000 hour 2x3.9W LED light source. -Electrical: All drivers are constant voltage. 24VDC.
- -Dimming: Lutron L3DAE-Hilume 1% EcoSystem 120V-277V;
- Lutron LTEA-2Wire Hi-lume forward phase 120V; LTF- 0-10V dimming
- 120V or 277V
- -Adjustable L-Bracket: Allows for 3/8" 1" variable recessed depth alignment.
- -Housing: Fixture wall is .0625 extruded aluminum and has one 1/2" knockout on end where ballast is located.

Housing Dimensions: 3.50"Wx3"D

Length: See Chart

Patent: Design Patent No. 473,670S US Patent No. US 6,616.309 B2 Voltage: 120V or 277V.


**L Brackets:** Add suffix "M-1" or "MOD" = modified bracket (consult factory)

NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installationmustbeheldback3"fromcontactwithfixture. Please check your local electrical and building codes.

LED Wattage per Foot	Lumens per Foot	Color Temp.	CRI		
7.8W	712	3K-90	97		
7.8W	700	27K-90	90+		
7.8W	712	35K-90	90+		

Fixure Wattage per Foot	Lumens per Foot	Color Temp.	CRI
9.4W	390	3K-90	97
9.4W	382	27K-90	90+
9.4W	390	35K-90	90+



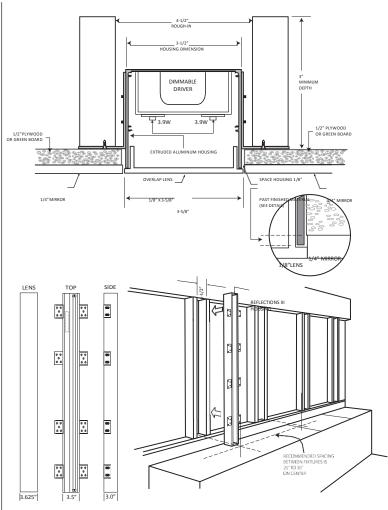

To Form a Catalog Number:	Prefix <b>DLED</b>	Series 122	Length* 49	LED Length*	Lens Type HTW-B	Lens Placement <b>OL</b>	Color Temp. <b>3K-90</b>	LED Watts per Ft. <b>7.8</b>	Wall Mount <b>WM</b>	Dimming LTF	Voltage 120
Which Specifies:	DLED	12000	Length	OPTIMAL DIMENSIONS: 25", 37", 49", 61" 73", 85", 97"	High Trans. Semi-Gloss White	Overlap <b>OL</b>	3K-90	7.8	WM	L3DAE Lutron Eco System	120-277
				TO SPECIFY AN OPTIMAL	HTW-B		27K-90			LTEA2W Lutron 2-Wire	120
				BER DIVISIBLE BY 3 AND	High Trans. Satin White HTW-SB		35K-90		LTF 2-Wire LTF	2-Wire LTF	120 277
IMPORTAN1 manufactur any dimens	е	•		NOTE: ANY DIMENSION MAY BE FABRICATED, BUT LIGHT UNIFORMITY MAY BE IMPACTED						2-Wire LTF-0-10 LTF-0-10	120 277

DLED-12000-49"MOL-HTW-B-OL-3K-90-7.8-WM-M-1-LTEA2-120 Ordering Example:



www.dreamscapelighting.com

info@dreamscapelighting.com