

### A Recessed Trimless Dimmable LED Linear Fixture for Damp Location with Screwless 98 CRI (3K) Decorative U-Shaped White Acrylic Diffuser and Integral Dimmable Driver

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

#### Fixture Description:

Multi-lamp recessed trimless dimmable linear LED fixture with integral flush-with-drywall self-finishing housing and screwless decorative white acrylic diffuser Suitable for wall or ceiling mount applications.

#### Features:

- Diffuser:** High Transmission .  
**B** - Semi-Gloss Standard  
**SB** - Satin Finish
- Lamping:** 35,000 hour 3.9W x 2 (7.8W per foot) LED light source.
- Dimming:** Select from the following options that feature LUTRON products.  
**L3DAE-ECO** Hi-Lume™ 1% Eco-System or 1% 3-Wire LUTRON **LTEA2W** Hi-Lume™ 1% 2-Wire Driver/Dimmer  
**LTF** 2-Wire Driver/Dimmer  
**LTF 0-10** Driver/Dimmer  
**LTF - ELV** Reverse Phase with Neutral.
- Adjustable L-Bracket:** Allows for 3/8" - 1" variable recessed depth alignment.
- Housing:** Fixture wall is .0625 extruded aluminum.
- White powder coated wiring cover.**
- Fixture has one 1/2" knockout on end where ballast is located.**

**Housing Dimensions:** 3.50"W x 3"D

**Length:** See Chart

**Patent:** Design Patent No. 473,670S

US Patent No. US 6,616,309 B2

**Voltage:** 120V or 277V.

L Brackets: Add suffix "M-1" or

"MOD" = modified bracket (consult factory)

**Label:** ETL for damp location.




LED Wattage per Foot	Lumens per Foot	Color Temp.	CRI
7.8W	712	3K-90	97
7.8W	700	27K-90	90+
7.8W	712	35K-90	90+

Fixture Wattage per Foot	Lumens per Foot	Color Temp.	CRI
9.4W	390	3K-90	97
9.4W	382	27K-90	90+
9.4W	390	35K-90	90+

Prefix	Series	Length Length* (Maximum Overall Length)	Lens Type	Lens Mounting	Temperature	LED Watts per Foot	Mounting	Dimming	Voltage
DLED	9000	" M.O.L.	HTW-B	FL	3K-90	7.8	WM	HDA	120
DLED	9000	" M.O.L.	High Transmission	Flush	3K-90	7.8	Wall Mount	L3DAE-ECO	120 or 277
		<b>TO SPECIFY AN OPTIMAL DIMENSION, USE A NUMBER DIVISIBLE BY 3 AND ADD 1" .</b>	Semi-Gloss	FL	27K-90		Ceiling Mount	LUTRON Hi-Lume™ 1% EcoSystem	
			White	HTW-B	35K-90		Mount	LTE	120
			High Transmission	HTW-SB			CM	LUTRON 1% 2-Wire	120
			Satin White					LTF	120
								2-Wire	120
								LTF-0-10	120
								2-Wire	277

**NOTE: ANY DIMENSION MAY BE FABRICATED, BUT LIGHT UNIFORMITY MAY BE IMPACTED**

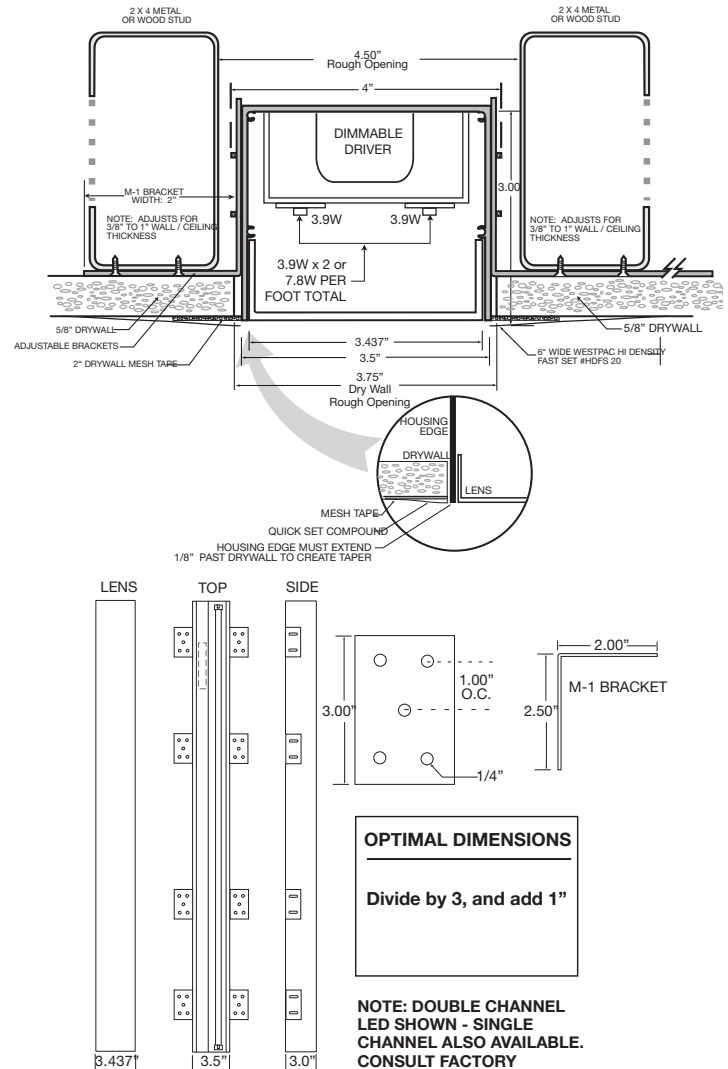

**OPTIMAL DIMENSIONS**  
 Divide by 3, and add 1"

**NOTE: DOUBLE CHANNEL LED SHOWN - SINGLE CHANNEL ALSO AVAILABLE. CONSULT FACTORY**

Ordering Example: **DLED-9000-49-HTW-B-FL-3K-90-7.8-WM-HDA-ECO-120**

**NOTE: This fixture is NON-IC. If fixture is installed in an insulated space, installation must be held back 3" from contact with fixture. Please check your local electrical and building codes.**

©2020 Dreamscape Lighting  
 Specifications are subject to change without notice.

5521 West Washington Blvd.  
 Los Angeles, CA 90016

Telephone: (323) 933-5760  
 FAX: (323) 933-3607

[www.dreamscapelighting.com](http://www.dreamscapelighting.com)  
[info@dreamscapelighting.com](mailto:info@dreamscapelighting.com)



DLED-9000-7.8\_15\_21