

Solid Brass Exterior Accent Lighting Fixture Lamping: 1 x 5W LED Lumens: 177

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Fixture Description:

A cast brass wet location path light utilizing a 4 watt, 177 lumens energy saving 35,000 hour LED lamp for downlighting, wall washing, path lighting or grazing illumination techniques.

Construction:

A solid brass sand casting with a glass sealed louvered aperture.

Electrical:

DLED-126-5W: remote 12v power supply required.

DLED-126-SSD-5W: 120v or 277v feed wire to Low Voltage (12v). SSD Mesa comes with integral electronic solid state power supply requiring a 12olt AC power to LED module. Power supply is dimmable using reverse phase technology with a neutral present, dimming down to 20%.

Mounting:

Solid brass 8/32" phillips screws mount faceplate to 2-gang and standard 4x4 electrical mounting box. Custom brass back box available.


Finishes: *Powder Coat Finishes

1. Verde, 2. Pewter, 3. Copper Bronze, 4. White, 5. Ancient Bronze, 6. Brass Bronze, 7. Custom, 8. Copper Plate, 9. Ancient Verde, 10. Grey Bronze, 11. Rust Brown*, 12. Black*, 13. Pewter, 14. Oil-Rubbed Bronze, 15. Copper Edged Bronze, 16. Black Iron Textured Matte*, 17. Copper Edge Bronze*

Cat. Number	Description
DL-260	4" square deep steel box
DL-260-B	4" square deep brass box
DL-261	Cast aluminum wet location box
DL-262	2 gang 1/2" raised mounting ring for use with DL-262 2-Gang Mud Ring (included with face plate)

Lamping

Cat. Number	Description
406	5W 2750K LED, Spot or Flood (40°), 177 lumens 12V AC/DC, Optional beam patterns available

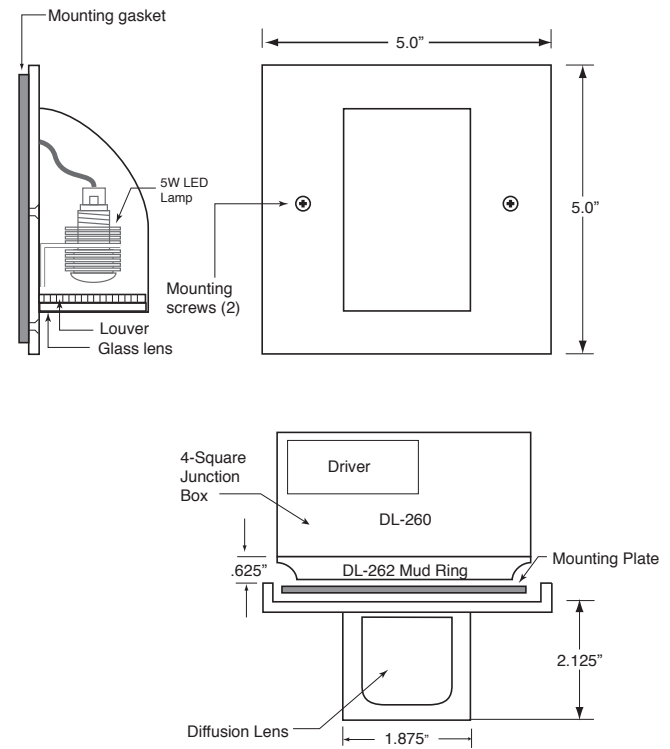

Solid brass mounting box



4" square deep box with mounting ring

Cast aluminum wet location mounting box

DL-260-B
4-5/8" SQ. x 3" D

DL-260
4" SQ. x 2-1/4" D

DL-261
4-1/2" SQ. x 3" D



To Form a Catalog Number:	Part No.	Lens	Lamp	Voltage	Finish
	DLED-126-SSD	B	406 FL	120	4
Which Specifies:	DLED-126-SSD	A - Linear B - Diffusion	406- 5W 2750K LED FL-Flood SP-Spot (other color temps. available)	120V 240V 277V	4 - White See all finishes above
	DLED-126 5Watt Requires 12v remote AC/DC power supply.				

Ordering Example: **DLED-126-SSD-B-406-FL-120-4**